

MATERIAL COST BREAKDOWN


Arms (2)	\$2.24
Edges (6)	\$3.90
Waste (10%)	\$0.61
Screw Eyes (8)	\$3.92
Steel Rope (5.08 ft)	\$1.83
Ferrules (8)	\$11.92
Screws (4)	\$0.28
TOTAL	<u>\$24.70</u>

Red Oak 6+ wide, S2S 13/16

\$2.97/bdft

ARMS

NOT TO SCALE

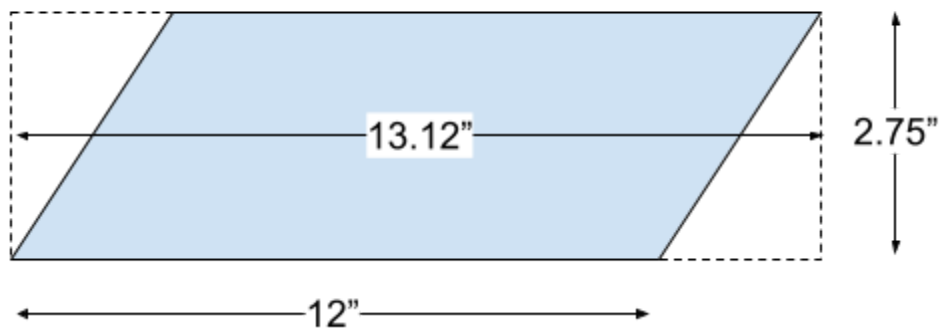


Thickness = 1.5"

MATERIAL REPRESENTED IN THE DOTTED LINES IS
CONSIDERED TO BE WASTED BECAUSE OF THE ANGLES.

2 pieces required @ $(13.2 \times 2.75 \times 1.5 / 144 = 0.378)$ board feet @ $(\$2.97)$ per board foot = $2 \times \$1.12 = \2.24
10% waste = **\$0.22**

EDGES

NOT TO SCALE

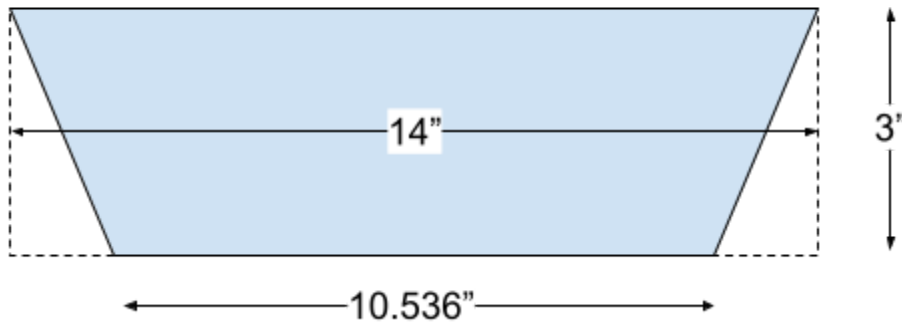

Thickness = 0.75"

MATERIAL REPRESENTED IN THE DOTTED LINES IS
CONSIDERED TO BE WASTED BECAUSE OF THE ANGLES.

6 pieces required @ $(14 \times 3 \times 0.75 / 144 = 0.21875)$ board feet @ $(\$2.97)$ per board foot = $6 \times \$0.65 =$ **\$3.90**
10% waste = **\$0.39**

HARDWARE



1/8 in. x 1-1/2 in. Stainless Steel Screw Eye
\$1.47 for 3 pcs

8 pieces required @ $(\$1.47 \text{ for } 3 = 49\text{¢})$ each = $8 \times 49\text{¢} =$ **\$3.92**



3/32 in. x 50 ft. Galvanized Steel Uncoated Wire Rope
36¢ per foot

3x 18" pieces required @ 3¢ per inch = $3 \times 18 \times 3\text{¢} =$ **\$1.62**
1x 7" piece required @ 3¢ per inch = $7 \times 3\text{¢} =$ **\$0.21**



3/32 in. Aluminum Ferrule and Stop

\$2.97 for 2 sets

8 sets required @ $(\$2.97/2 = \$1.49)$ per set = $8 * \$1.49 =$ **\$11.92**



#8 x 2 in. Coarse Thread Construction Screws

\$10.48 for 147 pcs

4 pieces required @ $(\$10.48/147 = \$0.0712)$ per piece = $4 * \$0.0712 =$ **\$0.28**